


PARTS MANUAL

Serial Number 225001 & up

WE225 TRAILER LOG SPLITTER

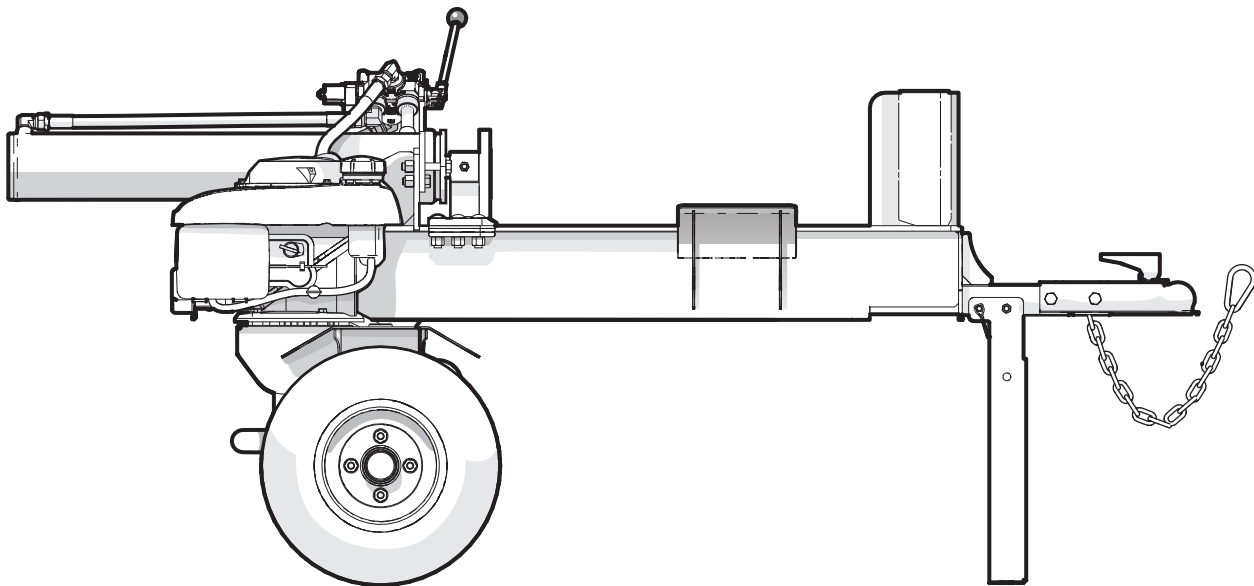

Foreword

This Wallenstein parts manual is prepared to assist customers in ordering quality OEM replacement parts.

Regular maintenance combined with replacing old, worn or broken parts with the correct OEM parts is essential in prolonging the life of your Wallenstein product. Refer to this manual to identify replacement parts.

To order parts, contact your Wallenstein dealer or distributor. Have the product model and serial number handy.

If your dealer is no longer available, please go to our website: <http://www.wallensteinequipment.com> and click on the [Dealer Locator](#) to find the nearest dealer.

All information contained in this parts manual is current as per the revision date at the bottom of the page. Wallenstein reserves the right to change product specifications at any time without notice.

If your product specifications differ from those contained in this manual, contact Wallenstein for current information.

Reproduction of information in this parts manual is prohibited without prior written permission from Wallenstein Equipment Inc.

Wallenstein Equipment Inc. • © 2018



WARNING!


Refer to the operators manual for safe operation and maintenance.

Maintenance should be performed by trained personnel only.

Serial Number Location

Always provide the model and serial number of your Wallenstein product when ordering parts or requesting service or other information. This information is found on the product information plate as shown below.

Record product information for future reference.

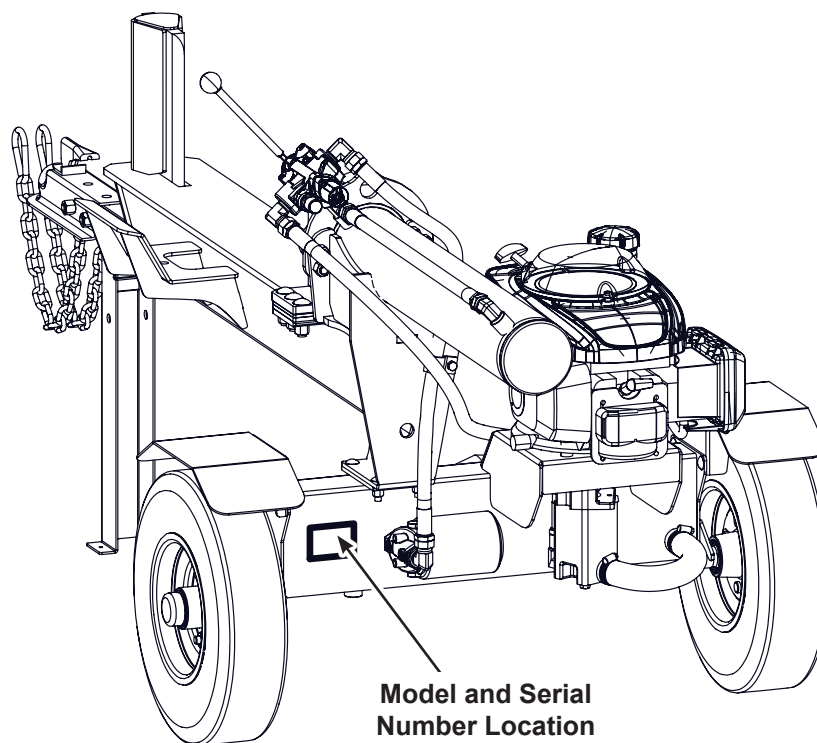

www.wallensteinequipment.com

Contents

Main Parts4

Horizontal Cylinder Assembly5

Engine and Pump Assembly6

Hub Assembly7

Cylinder Detail7

Hydraulic Plumbing Diagram8

Z56209 Service Kit9

Decal Layout.....10


Accessories11

Common Bolt Torque Values12

Hydraulic Fitting Torque Values13

Wheel Lug Torque Values.....13

Main Parts

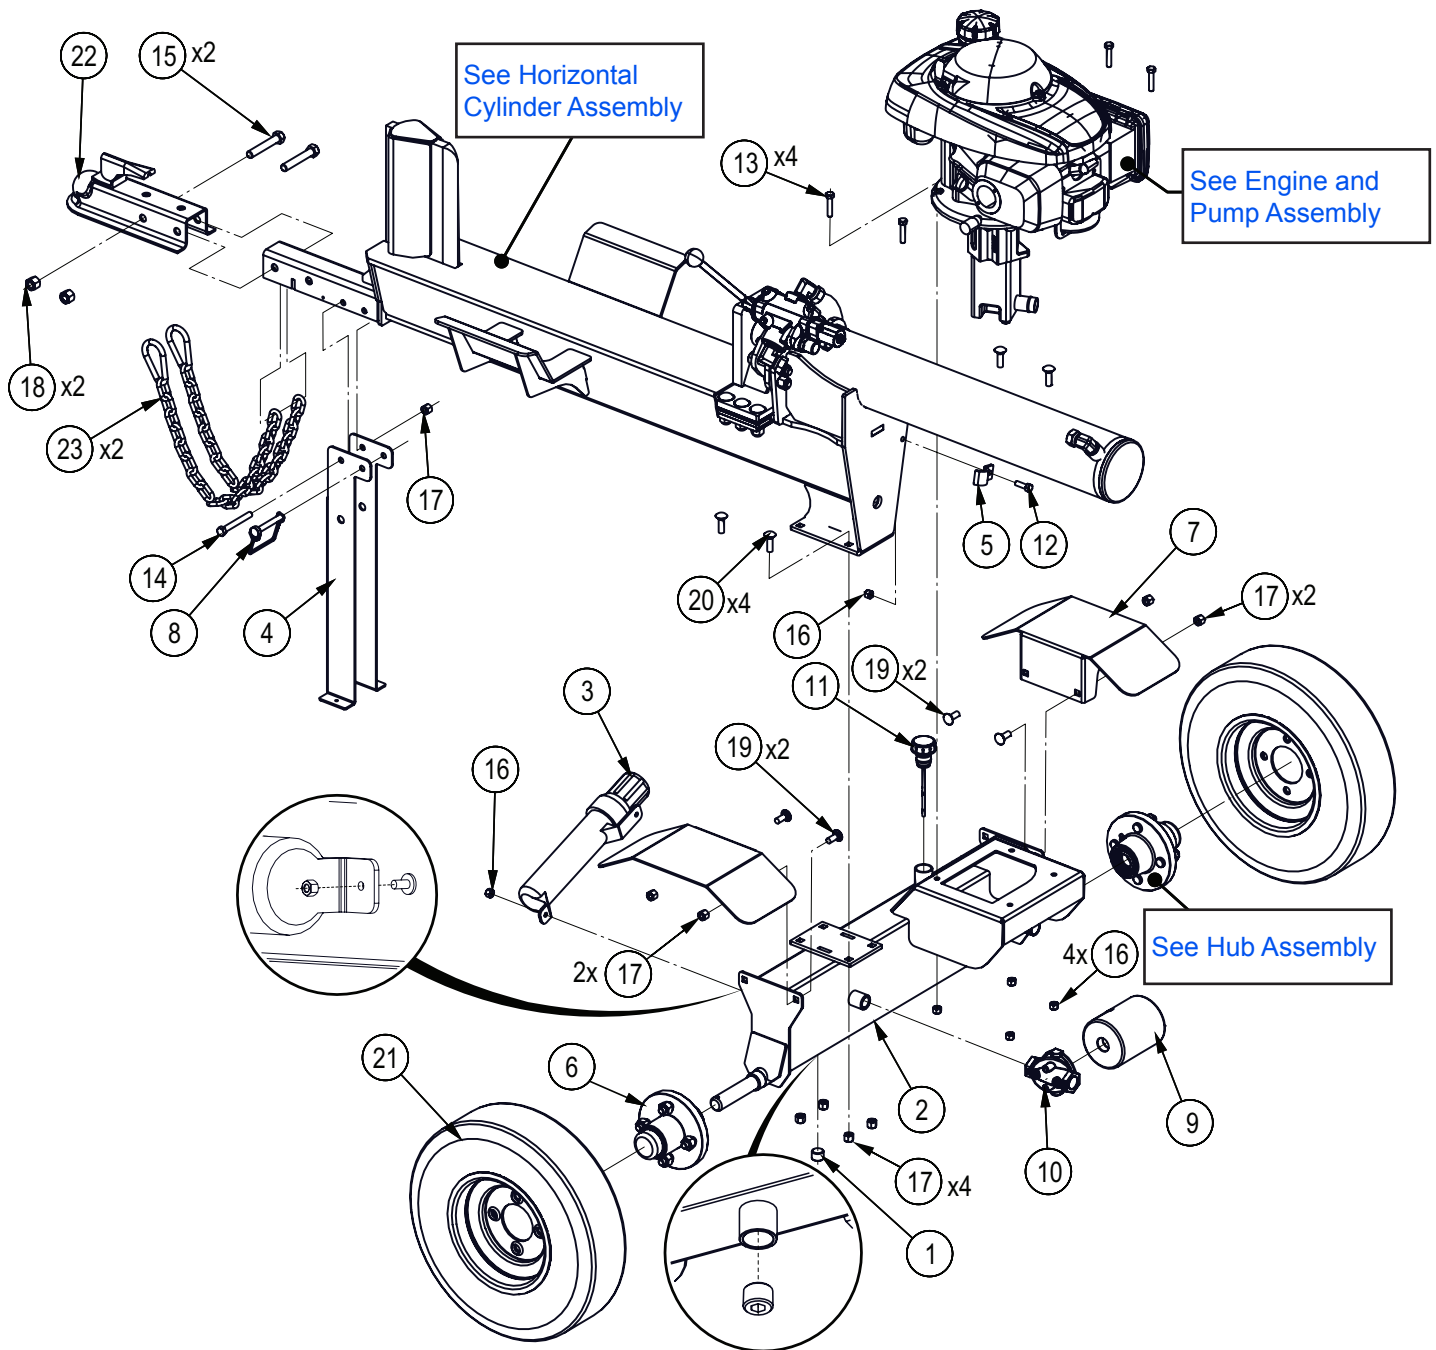


Item No.	Part No.	Description	Qty
1	Z51192	Socket Plug, MP 08	1
2	2064W806	Tank, Axle and Mount	1
3	Z96503	Manual Tube, 3-1/2" Short	1
4	2064L832	Leg	1
5	6011L128	Single Hose Clamp	1
6	Z91202	Idler Hub Assy, 1000lbs x 4on4" x 1"	2
7	2064L562	Plain Fender	2
8	Z12432	Snap Lock Pin, 3/8" x 2-1/2"	1
9	Z55301	Particulate Filter, FP12	1
10	Z55302	Filter Cap, MP12 x FP12	1
11	Z55402	Vented Plug Dipstick x 5"	1
12	Z71210	Hex Bolt, 5/16NC x 1	

Item No.	Part No.	Description	Qty
13	Z71215	Hex Bolt, 5/16NC x 1-1/2"	4
14	Z71330	Hex Bolt, 3/8NC x 3"	1
15	Z71530	Hex Bolt, 1/2NC x 3"	2
16	Z72221	Hex Lock Nut, 5/16NC	6
17	Z72231	Hex Lock Nut, 3/8NC	9
18	Z72251	Hex Lock Nut, 1/2NC	2
19	Z76231	Carriage Bolt, 3/8NC x 1"	4
20	Z76232	Carriage Bolt, 3/8NC x 1-1/4"	4
21	Z91301	4.80-8 LRB SportTrail 4on4"	2
22	Z91614	Hitch Coupler, 2" Ball x 2" x 3500lbs	1
23	Z92303	Safety Chain, 1/4" x 2ft with Snap	2


ECN0399

Horizontal Cylinder Assembly

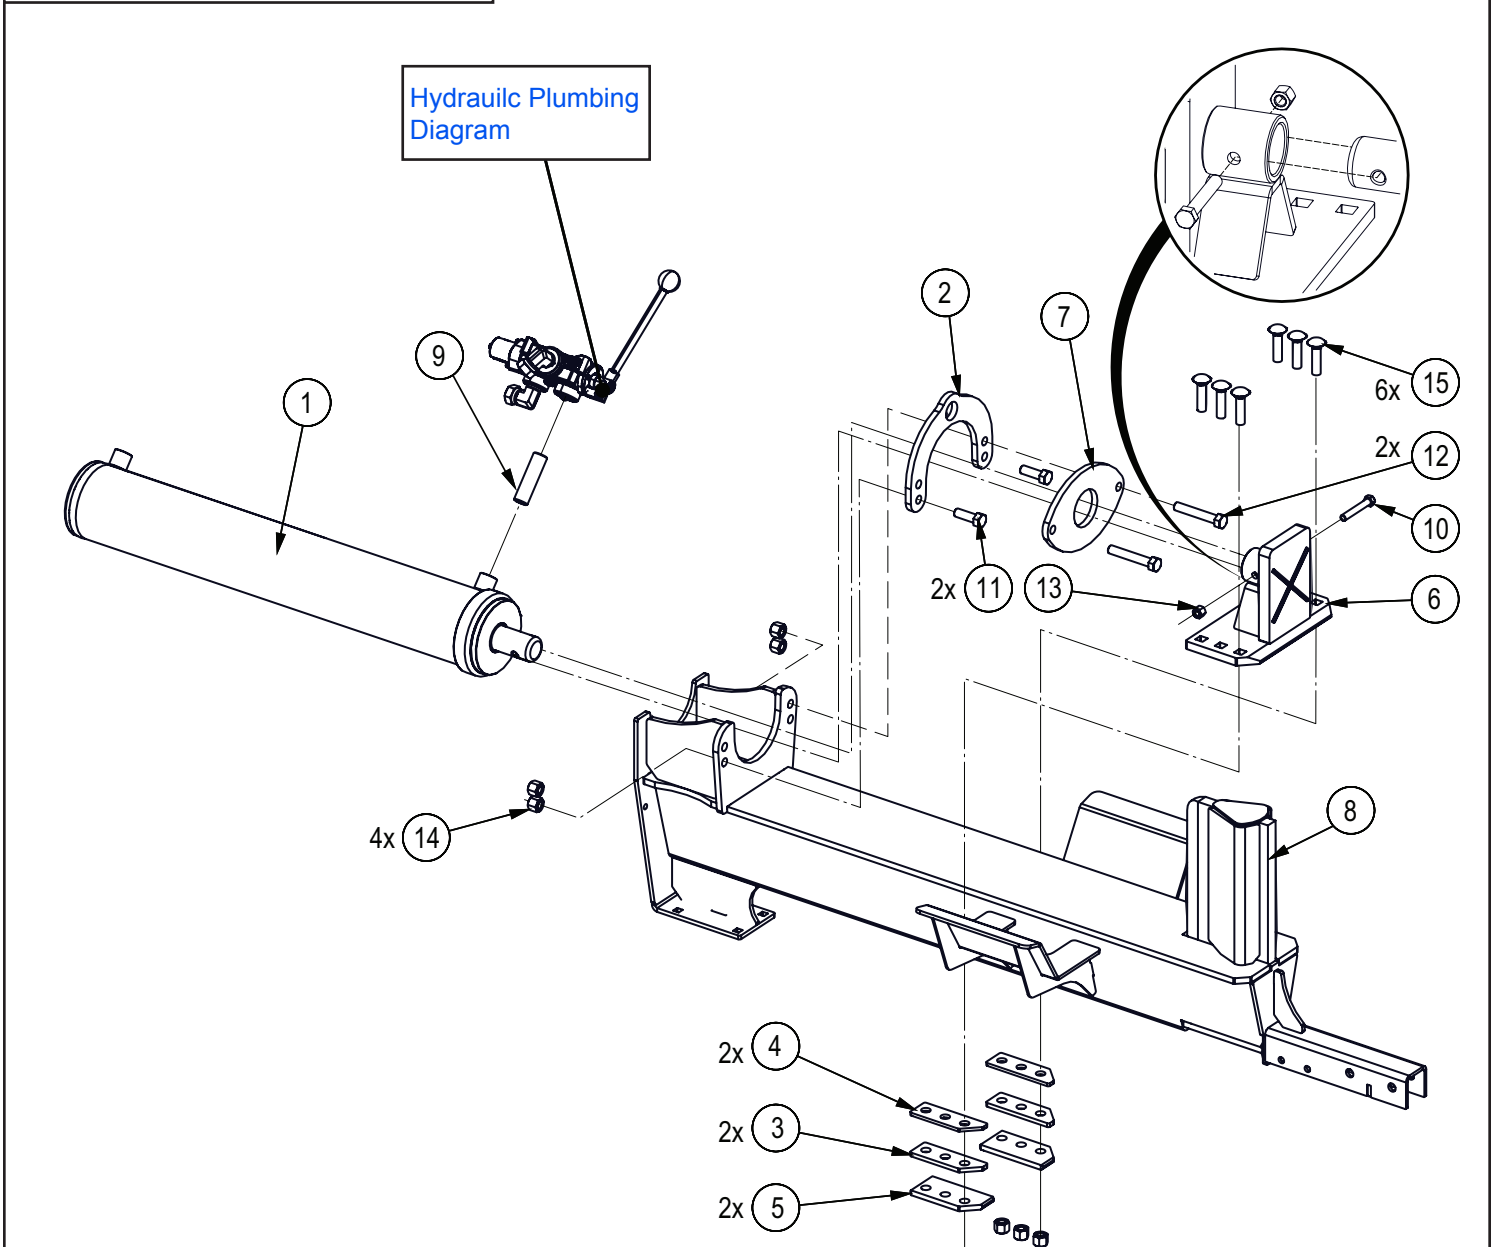


Item No.	Part No.	Description	Qty
1	2011C101	Cylinder, 4 x 24 x 1-1/2	1
2	2064L564	Cylinder Saddle	1
3	2064L802	Middle Gib	2
4	2064L803	Top Gibb	2
5	2064L804	Bottom Sliding Gibb	2
6	2064W803	Push Block	1
7	2064L563	Gland Clamp Plate	1
8	2064W810	Main Splitter Bed	1
9	Z51113	Pipe Nipple, MP08 x 3"	1
10	Z71325	Hex Bolt, 3/8NC x 2-1/2"	1
11	Z71515	Hex Bolt, 1/2NC x 1-1/2"	2
12	Z71530	Hex Bolt, 1/2NC x 3"	2
13	Z72231	Hex Lock Nut, 3/8NC	1
14	Z72251	Hex Lock Nut, 1/2NC	10
15	Z76255	Carriage Bolt, 1/2NC x 2"	6

Engine and Pump Assembly

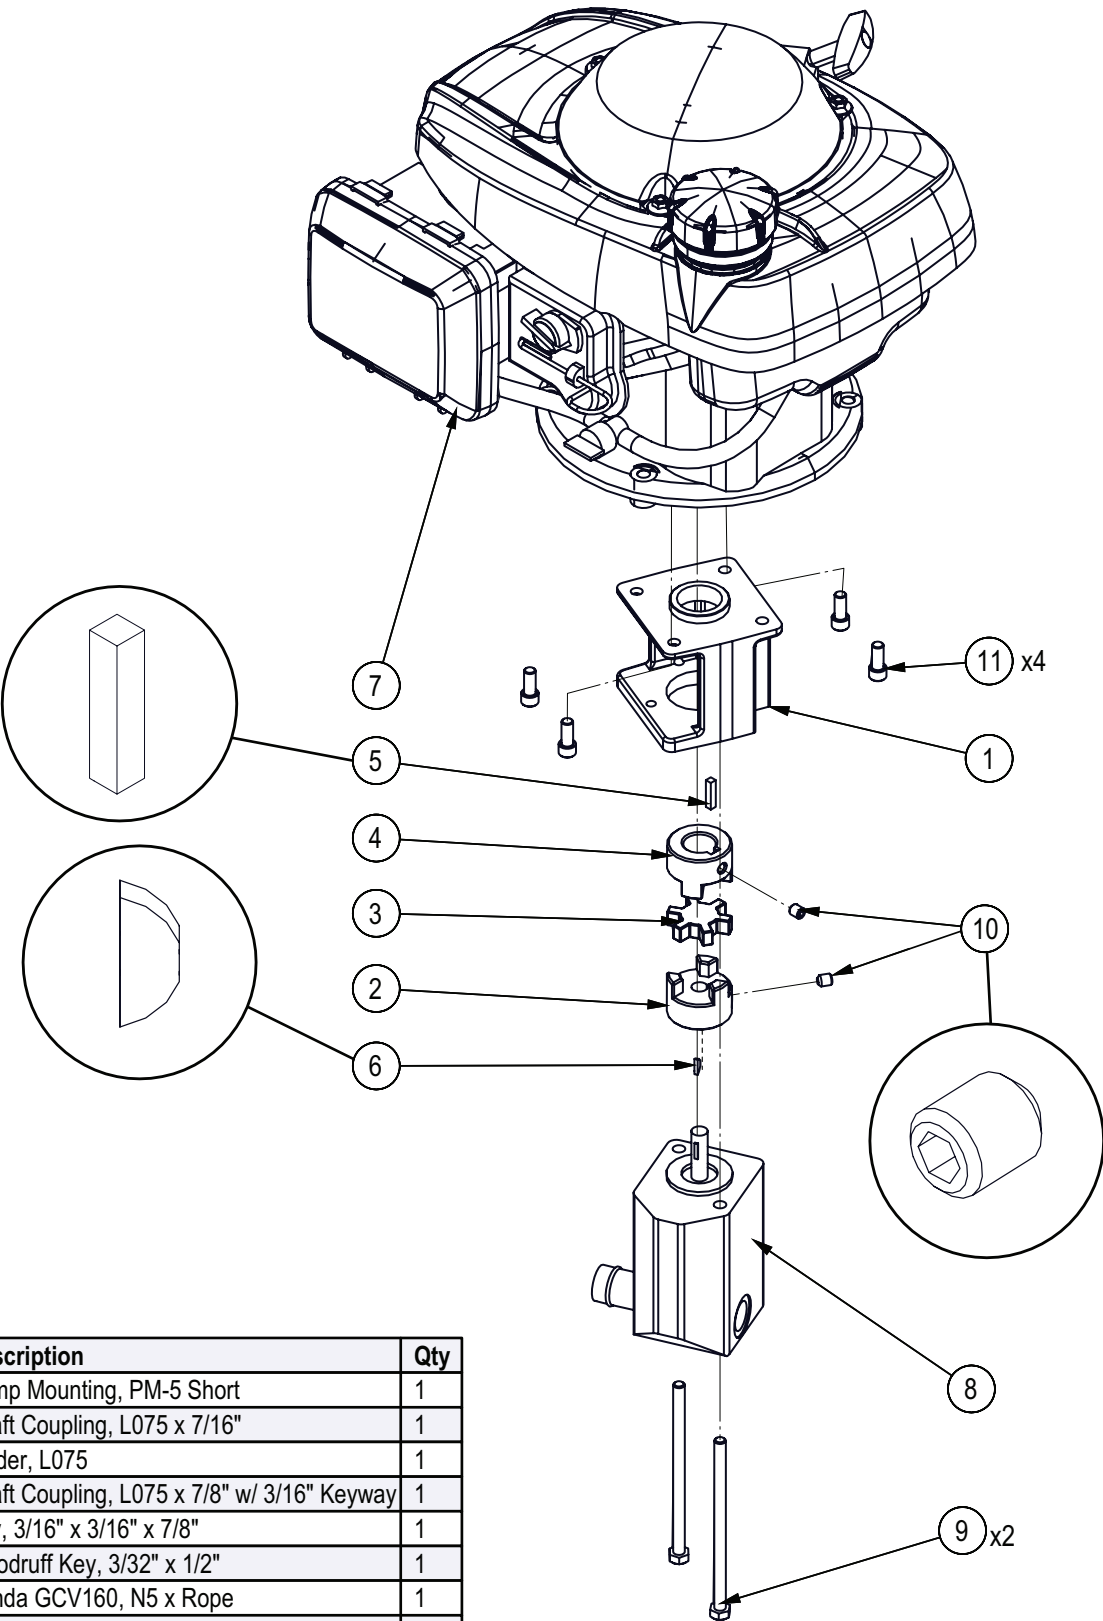

Item No.	Part No.	Description	Qty
1	2093M302	Pump Mounting, PM-5 Short	1
2	Z46407	Shaft Coupling, L075 x 7/16"	1
3	Z46408	Spider, L075	1
4	Z46433	Shaft Coupling, L075 x 7/8" w/ 3/16" Keyway	1
5	Z46521	Key, 3/16" x 3/16" x 7/8"	1
6	Z46591	Woodruff Key, 3/32" x 1/2"	1
7	Z47406	Honda GCV160, N5 x Rope	1
8	Z53201	Two-Stage Pump, 11GPM	1
9	Z71255	Hex Bolt, 5/16NC x 5-1/2"	2
10	Z74121	Set Screw, 5/16NC x 3/8"	2
11	Z75121	SHCS, 5/16NF x 3/4"	4

Hub Assembly

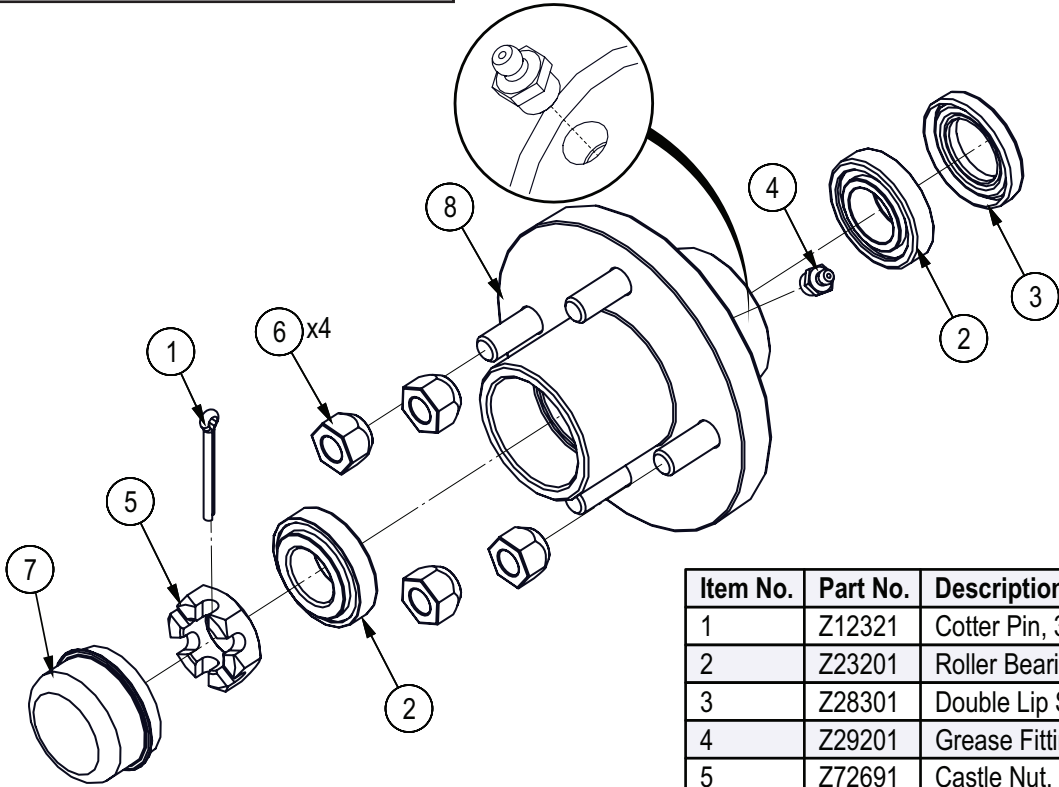


Item No.	Part No.	Description	Qty
1	Z12321	Cotter Pin, 3/16" x 1-3/4"	1
2	Z23201	Roller Bearing, L44643 L44610	2
3	Z28301	Double Lip Seal, 1-1/4"	1
4	Z29201	Grease Fitting, MP02	1
5	Z72691	Castle Nut, 1NF x 9/16" Thick	1
6	Z72931	Lug Nut, 1/2NF	4
7	Z91801	Dust Cap, 1.98 Bore	1
8	Z91201	Hub, 1000lbs x 4on4	1

Cylinder Detail




Seal Kit #SLK-4015

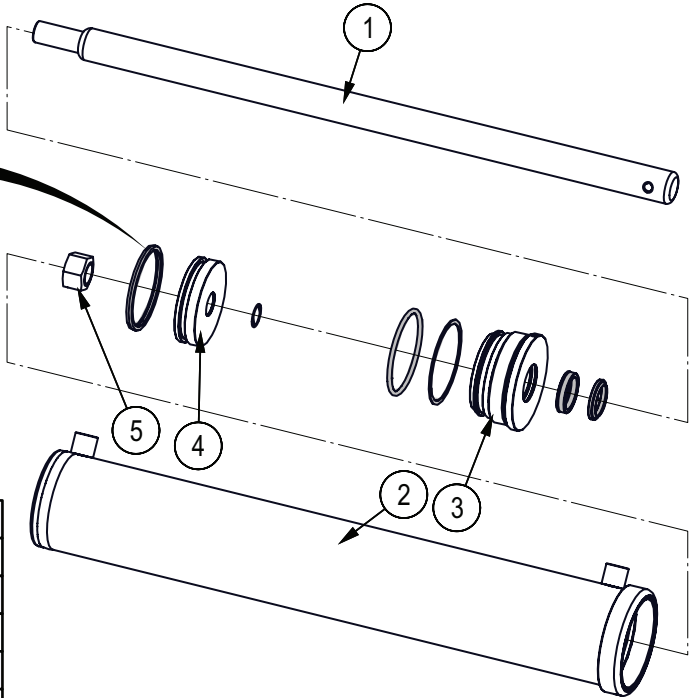


Item No.	Part No.	Description	Qty
1	2011C1012	Rod, 1-1/2 x 1	1
2	2011C1014	Barrel, 4"	1
3	G400-150S	Gland, 4" x 1-1/2"	1
4	P100-400SP	Piston, 4" Bore	1
5	Z72292G8	Hex Lock Nut 1NF Grade 8	1

Hydraulic Plumbing Diagram

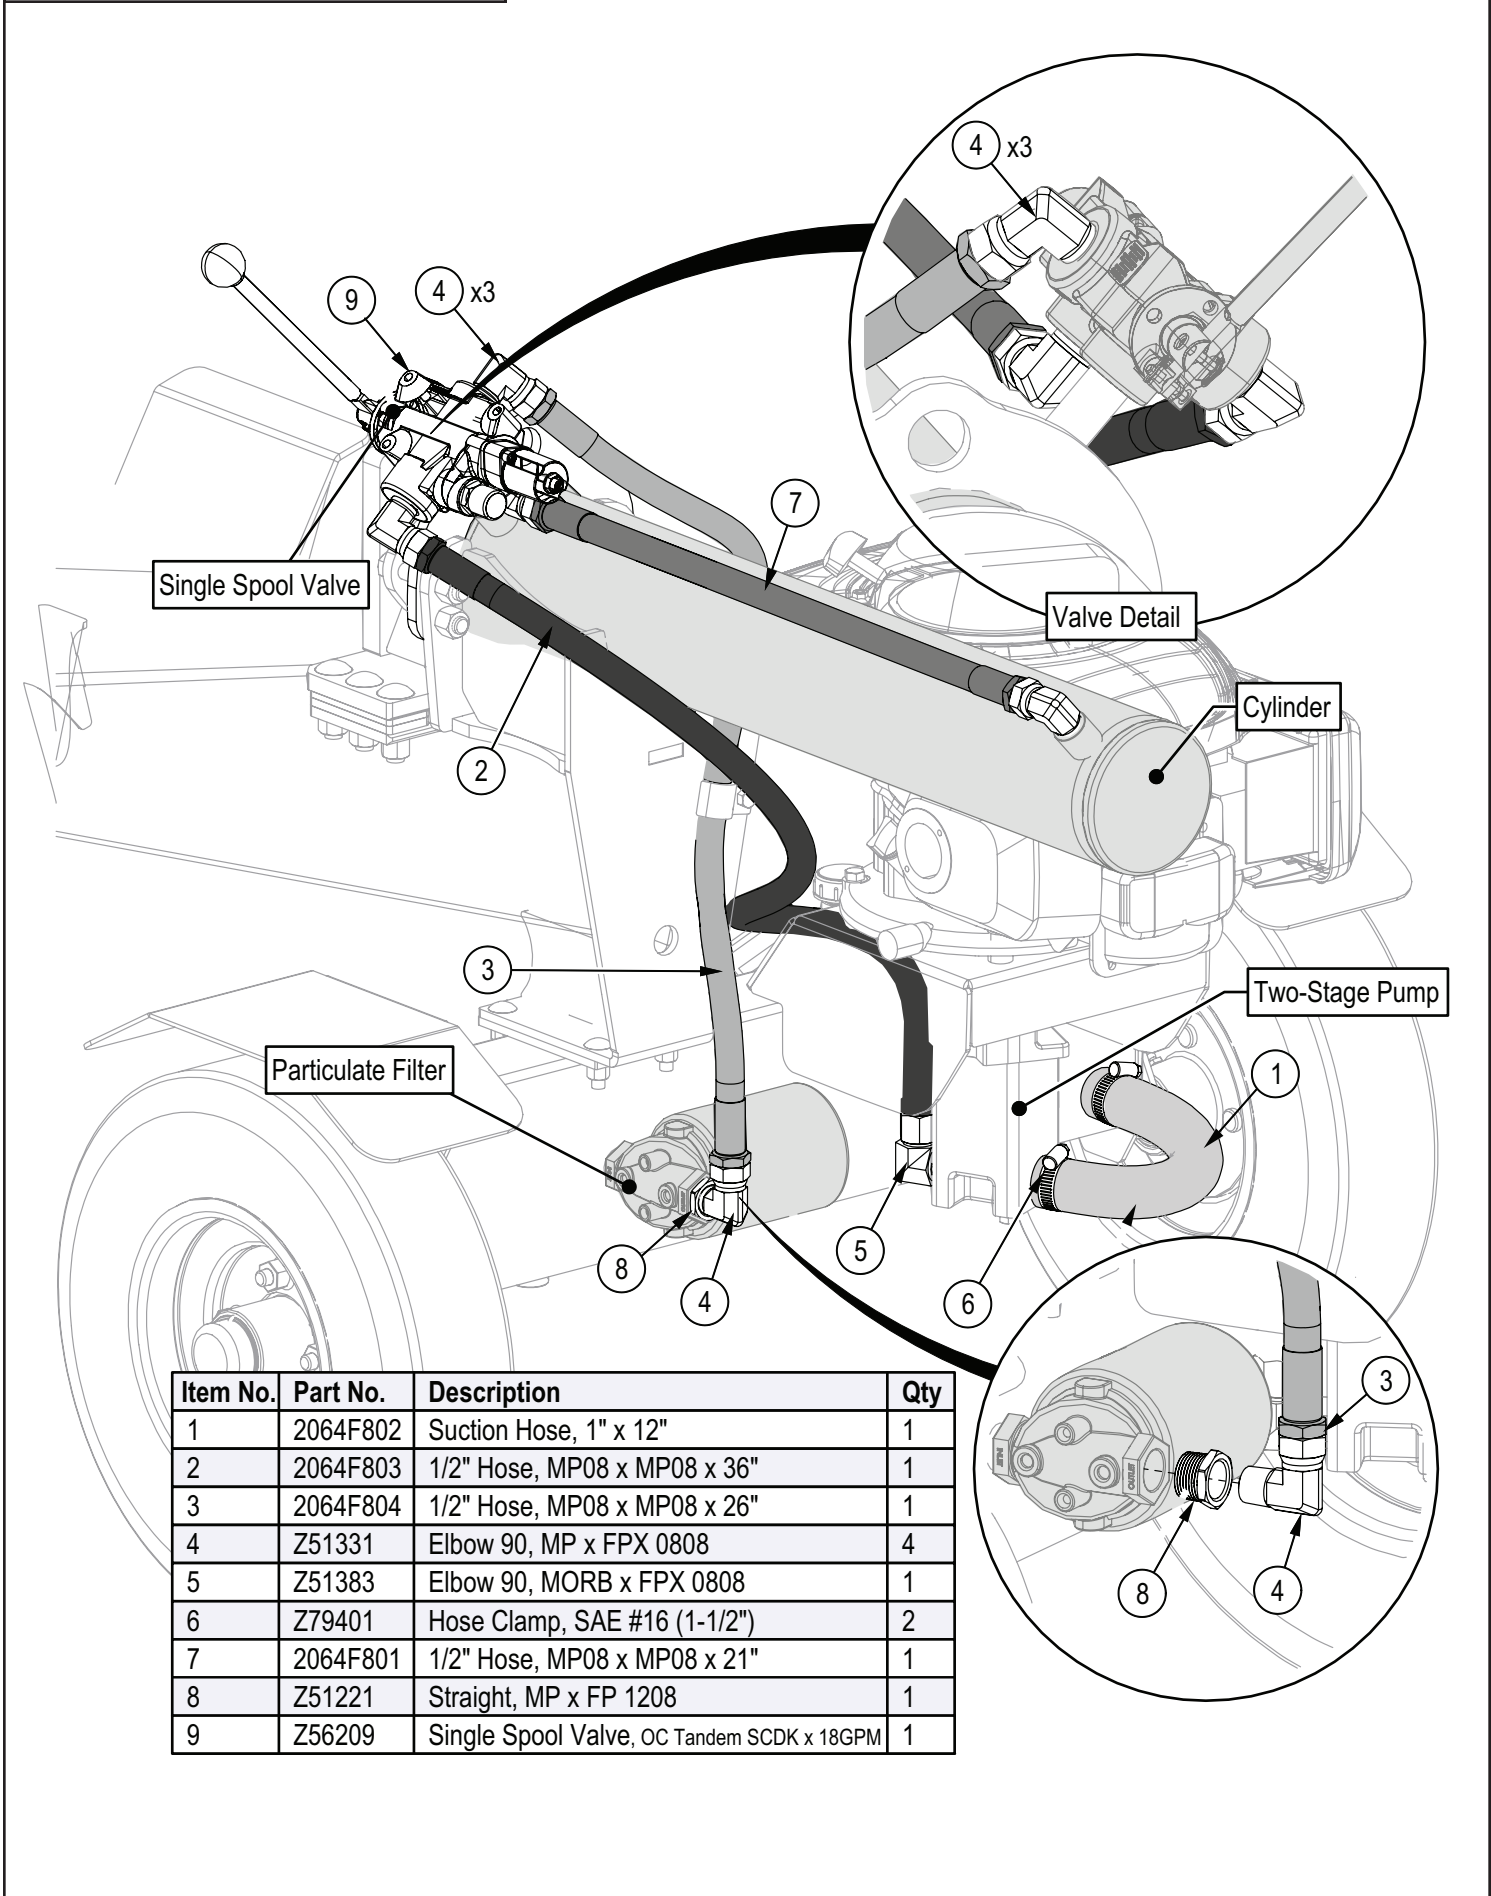



Z56209 Service Kit

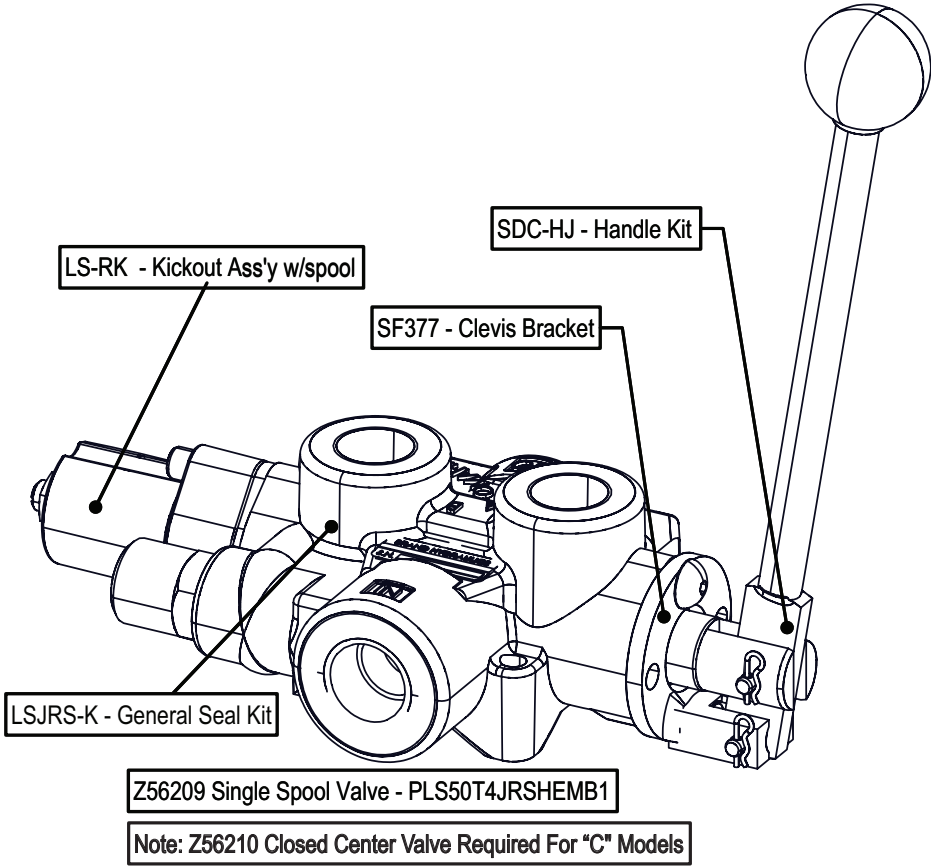

Decal Layout




IMPORTANT! If parts are replaced that have safety signs on them, new signs must be applied. Safety signs must always be replaced if they become damaged, are removed, or become illegible.

Safety signs are included in the product decal kit available from your authorized dealer. Decals are not available separately.

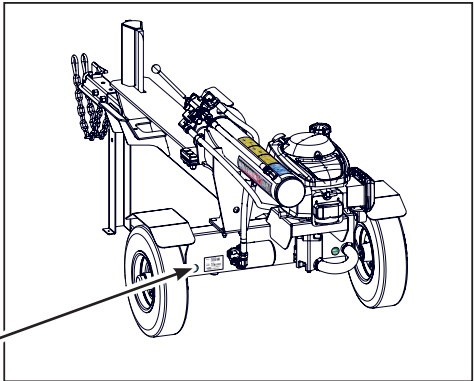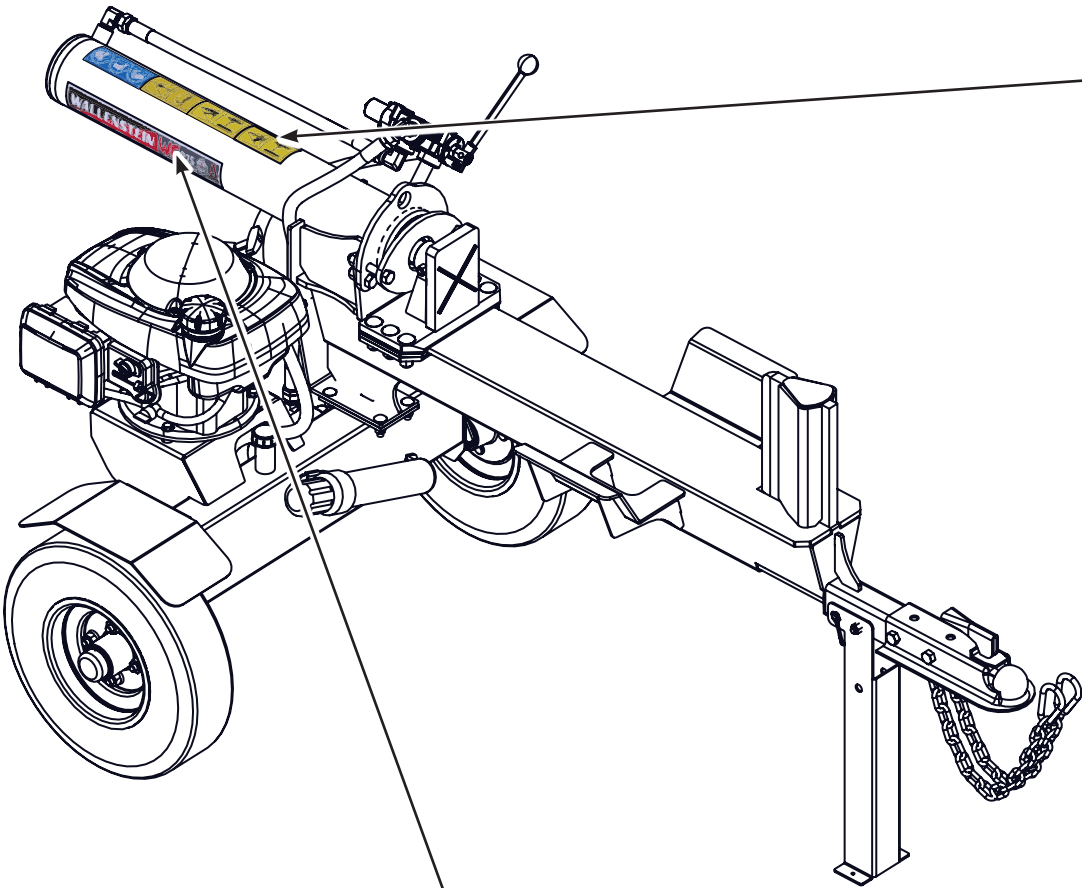

Accessories

Call your dealer for pricing and availability

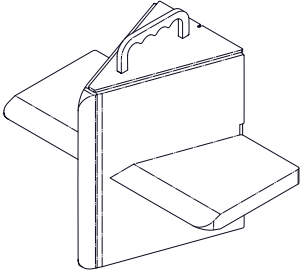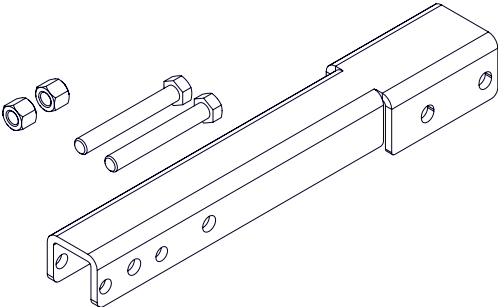	<p>4-way Wedge – P/N W4110</p> <p>Boost your productivity and make quick work out of logs by splitting four pieces at once. This is an ideal way to save time.</p>
	<p>12" Hitch Extension – P/N W4202</p> <p>Increases your vehicle to machine clearance, helps when backing up.</p>
	<p>All Weather Wood Splitter Cover – P/N W4204</p> <p>Heavy duty industrial material, made in Canada. Helps protect your splitter from harsh elements.</p>

Common Bolt Torque Values

Checking Bolt Torque

The tables shown give correct torque values for various bolts and capscrews. Tighten all bolts to the torque values specified in the table, unless indicated otherwise. Check tightness of bolts periodically.

IMPORTANT! If replacing hardware, use fasteners of the same grade.

IMPORTANT! Torque figures indicated in the table are for non-greased or non-oiled threads. Do not grease or oil threads unless indicated otherwise. When using a thread locker, increase torque values by 5%.



NOTE: Bolt grades are identified by their head markings.

Imperial Bolt Torque Specifications

Bolt Diameter	Torque Value					
	SAE Gr. 2		SAE Gr. 5		SAE Gr. 8	
	lbf•ft	N•m	lbf•ft	N•m	lbf•ft	N•m
1/4"	6	8	9	12	12	17
5/16"	10	13	19	25	27	36
3/8"	20	27	33	45	45	63
7/16"	30	41	53	72	75	100
1/2"	45	61	80	110	115	155
9/16"	60	95	115	155	165	220
5/8"	95	128	160	215	220	305
3/4"	165	225	290	390	400	540
7/8"	170	230	420	570	650	880
1"	225	345	630	850	970	1320



SAE Gr. 2



SAE Gr. 5



SAE Gr. 8

Metric Bolt Torque Specifications

Bolt Diameter	Torque Value			
	Gr. 8.8		Gr. 10.9	
	lbf•ft	N•m	lbf•ft	N•m
M3	0.4	0.5	1.3	1.8
M4	2.2	3	3.3	4.5
M6	7	10	11	15
M8	18	25	26	35
M10	37	50	52	70
M12	66	90	92	125
M16	166	225	229	310
M20	321	435	450	610
M30	1,103	1 495	1,550	2 100
M36	1,917	2 600	2,700	3 675



8.8



10.9

Hydraulic Fitting Torque Values

Tightening Flare Type Tube Fittings

1. Check flare and flare seat for defects that might cause leakage.
2. Align tube with fitting before tightening.
3. Hand-tighten swivel nut until snug.
4. To prevent twisting the tube, use two wrenches. Place one wrench on the connector body and tighten the swivel nut with the second. Torque to values shown.

If a torque wrench is not available, use the FFFT (Flats From Finger Tight) method.

Hydraulic Fitting Torque


Tube Size OD	Hex Size Across Flats	Torque value		Flats From Finger Tight	
		lbf•ft	N•m	Flats	Turns
3/16	7/16	6	8	2	1/6
1/4	9/16	11–12	15–17	2	1/6
5/16	5/8	14–16	19–22	2	1/6
3/8	11/16	20–22	27–30	1-1/4	1/6
1/2	7/8	44–48	59–65	1	1/6
5/8	1	50–58	68–79	1	1/6
3/4	1-1/4	79–88	107–119	1	1/8
1	1-5/8	117–125	158–170	1	1/8

Values shown are for non-lubricated connections.

Wheel Lug Torque Values

It is extremely important safety procedure to apply and maintain proper wheel mounting torque on your trailer axle. Torque wrenches are the best method to assure the proper amount of torque is being applied to a fastener.

Wheel lugs should be torqued before first road use and after each wheel removal. Check and re torque after the first 10 miles (16 km), 25 miles (40 km), and again at 50 miles (80 km). Check periodically thereafter.

 **NOTE:** *Wheel lugs must be applied and maintained at the proper torque levels to prevent loose wheels, broken studs, and possible dangerous separation of wheels from your axle.*

- Start all lugs by hand to prevent cross threading.
- Tighten lugs in sequence, per wheel lug torque sequence chart.
- The tightening of the fasteners should be done in stages. Following the recommended sequence, tighten fasteners per wheel torque requirements chart.

Wheel Lug Nut Torque

Wheel Size	Units	1st Stage	2nd Stage	3rd Stage
8"	lbf•ft N•m	12–20 16–26	30–35 39–45.5	45–55 58.5–71.5
12"	lbf•ft N•m	20–25 26–32.5	35–40 45.5–52	50–60 65–78
13"	lbf•ft N•m	20–25 26–32.5	35–40 45.5–52	50–60 65–78
14"	lbf•ft N•m	20–25 26–32.5	50–60 65–78	90–120 117–156
15"	lbf•ft N•m	20–25 26–32.5	50–60 65–78	90–120 117–156
16"	lbf•ft N•m	20–25 26–32.5	50–60 65–78	90–120 117–156

Wheel Lug Torque Pattern

