
Set-up Instructions



BX36S BX52S BX72S BX102S



IMPORTANT! Inspect for damage from shipping. Immediately contact the shipping company if damage is found.

Note: Some parts are attached to skid with screws. Shipping brackets are not reused.

Always Put Safety First!

Read these assembly instructions thoroughly before beginning. Make sure each step is understood before attempting it. Be familiar with all safety signs on the machine and their meaning.

Tighten all fasteners to the torque value specified on the last page. Recheck before using the machine.



Position the crate in a large open area to allow access from all sides during assembly.

Stay clear of overhead power lines and obstructions when lifting the machine during assembly. Contact with power lines can cause electrocution. Contact with obstructions can damage components or cause them to fail.

Keep the assembly area clean to prevent slipping or tripping.


Use a hoist when lifting components that weigh 50 lb (23 kg) or more to avoid back injury.


All lifting devices (straps, slings, chains, ratchet blocks) must comply with applicable local regulations and certifications. Wallenstein Equipment Inc. cannot accept responsibility for the use of sub-standard equipment and work practices.


Use lifting equipment with a capacity greater than the weight of the component. Place jack stands or wood blocking under the machine to securely stabilize it before working on it during assembly.


Use the correct tool for the job. Repair or replace broken or defective equipment or tools. Makeshift tools can create safety hazards. A tool that breaks or slips during use risks personal injury.


Avoid the risk of personal injury or machine damage! Read the operator's manual before using this equipment. Carefully read all safety messages in the manual and follow all safety signs on the machine. Assembly hardware is located inside operator's manual tube.

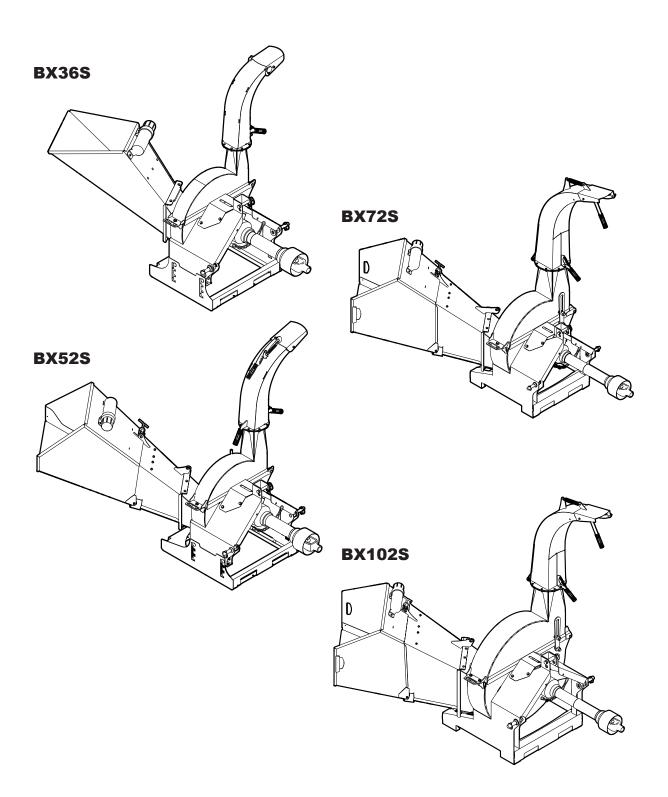

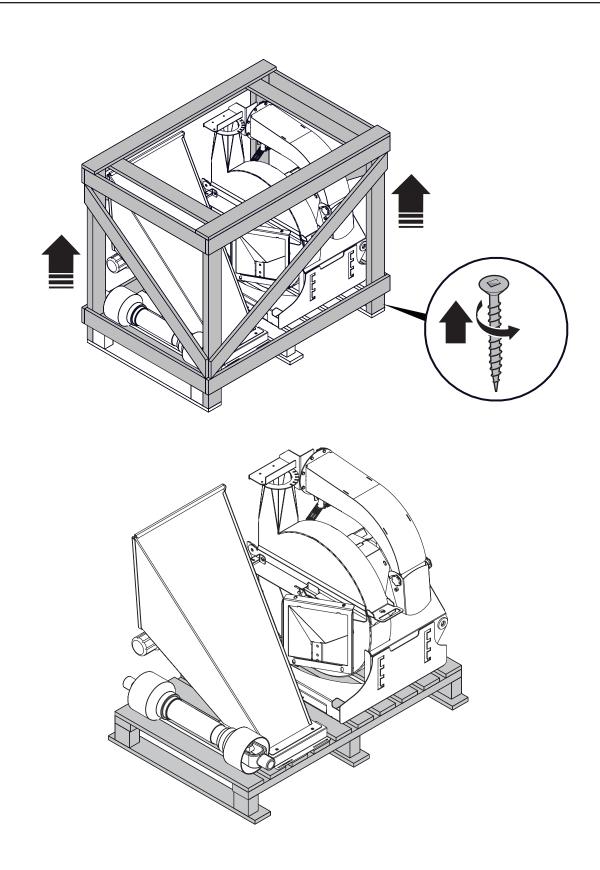


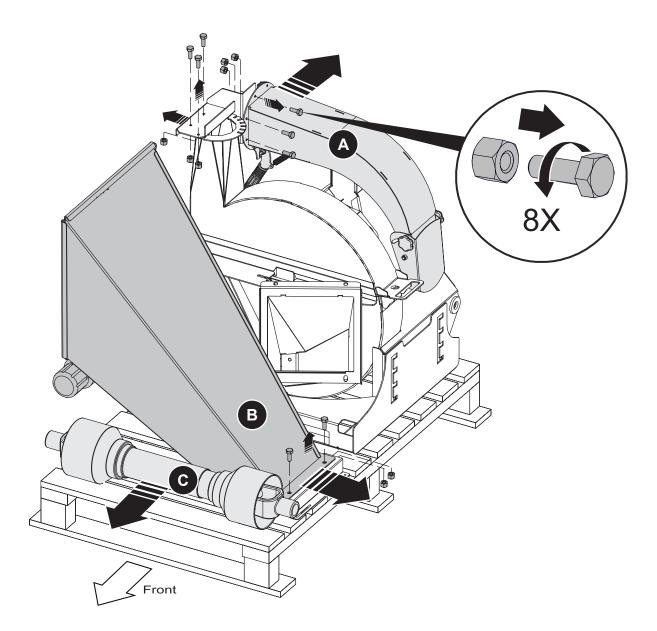


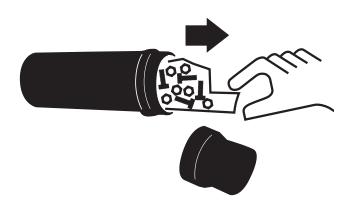

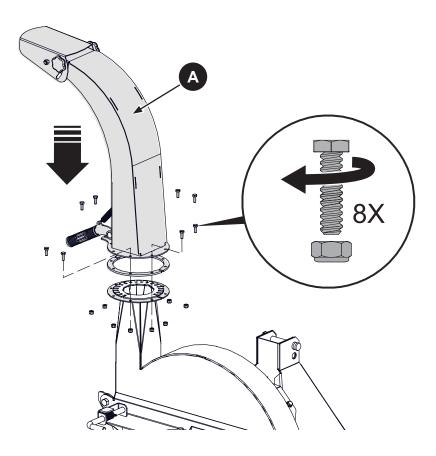


WALLENSTEIN

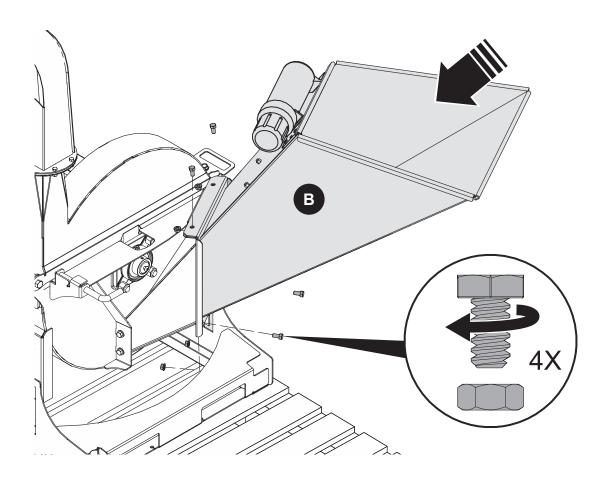

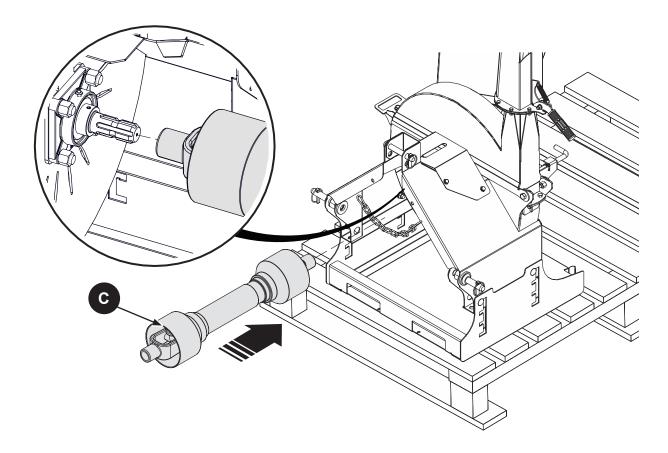



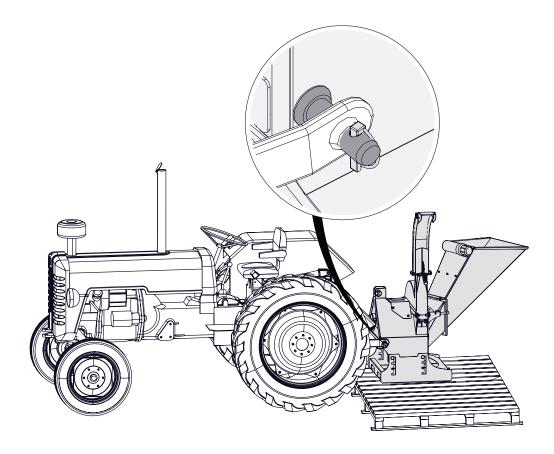


E

Η

Η

F

WALLENSTEIN





\checkmark	Pre-delivery Inspection							
	Inspect for damage from shipping. Immediately contact the shipping company if damage is found.							
BX S	BX S–Series Wood Chipper							
	Check blade clearance and that rotor turns freely							
	Check that discharge and deflector move freely							
	Check that all fasteners are tight							
	Check that lock pins align and move freely							
	Check all grease points and lubricate pivot points							
	Review operating and safety instructions in the Operator's Manual							
Safe	Safety Checks							
	All Safety Decals Installed							
	Guards and Shields Installed and Secured							
	Check that the Slow Moving Vehicle sign is installed							
	Check that retainers are installed through hitch points							
	Review operating and safety instructions in the Operator's Manual							

WALLENSTEIN

Bolt Torque Specifications

Checking Bolt Torque

The tables shown give correct torque values for various bolts and capscrews. Tighten all bolts to the torque values specified in the table, unless indicated otherwise. Check tightness of bolts periodically.

IMPORTANT! If replacing hardware, use fasteners of the same grade.

IMPORTANT! Torque figures indicated in the table are for non-greased or non-oiled threads. Do not grease or oil threads unless indicated otherwise. When using a thread locker, increase torque values by 5%.

Note: Bolt grades are identified by their head markings.

Imperial Bolt Torque Specifications

	Torque Value					
Bolt Diameter	SAE Gr. 2		SAE Gr. 5		SAE Gr. 8	
Diamotor	lbf•ft	N•m	lbf•ft	N•m	lbf•ft	N•m
1/4"	6	8	9	12	12	17
5/16"	10	13	19	25	27	36
3/8"	20	27	33	45	45	63
7/16"	30	41	53	72	75	100
1/2"	45	61	80	110	115	155
9/16"	60	95	115	155	165	220
5/8"	95	128	160	215	220	305
3/4"	165	225	290	390	400	540
7/8"	170	230	420	570	650	880
1"	225	345	630	850	970	1320

SAE Gr. 2 SAE Gr. 5 SAE Gr. 8

Metric Bolt Torque Specifications									
	Torque Value								
Bolt Diameter	Gr.	8.8	Gr. 10.9						
	lbf•ft	N•m	lbf•ft	N•m					
M3	0.4	0.5	1.3	1.8					
M4	2.2	3	3.3	4.5					
M6	7	10	11	15					
M8	18	25	26	35					
M10	37	50	52	70					
M12	66	90	92	125					
M16	166	225	229	310					
M20	321	435	450	610					
M30	1,103	1 495	1,550	2 100					
M36	1,917	2 600	2,700	3 675					
				-					

